

P/N: T300587

Copyright

© 2022, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: T300587

Commit: 86959

Language:

Modified: 2022-09-08

Formatted: 2022-09-08

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



| Imaging and optical data | |
|---------------------------------|--|
| Field of view (FOV) | <ul style="list-style-type: none"> • 24° × 18° • 14° × 10° |
| Minimum focus distance | <ul style="list-style-type: none"> • 0.18 m (0.59 ft), 24° • 1.0 m (3.28 ft), 14° |
| Minimum focus distance with MSX | <ul style="list-style-type: none"> • 0.5 m (1.64 ft), 24° • 1.0 m (3.28 ft), 14° |
| Focal length | <ul style="list-style-type: none"> • 17 mm (0.67 in), 24° • 29 mm (1.41 in), 14° |
| Spatial resolution (IFOV) | Dependent on the IR resolution of the camera. f = 17 mm (24°): <ul style="list-style-type: none"> • 320 × 240 pixels: 1.33 mrad/pixel • 464 × 348 pixels: 0.92 mrad/pixel • 640 × 480 pixels: 0.67 mrad/pixel f = 29 mm (14°): <ul style="list-style-type: none"> • 320 × 240 pixels: 0.75 mrad/pixel • 464 × 348 pixels: 0.52 mrad/pixel • 640 × 480 pixels: 0.38 mrad/pixel |
| Lens identification | Yes, service calibration required |
| F-number | <ul style="list-style-type: none"> • 1.3, 24° • 1.3, 14° |

| Physical data | |
|------------------|------------------------------------|
| Weight | 0.18 kg (0.40 lb) |
| Size (L × W × H) | 51 × 72 × 72 mm (2 × 2.8 × 2.8 in) |

| Shipping information | |
|----------------------|--|
| Packaging, type | Cardboard box |
| List of contents | <ul style="list-style-type: none"> • Lens • Front lens cap • Rear lens cap • Lens case |
| Packaging, weight | 0.410 kg (0.90 lb) |
| Packaging, size | 151 × 125 × 125 mm (5.9 × 4.9 × 4.9 in) |
| EAN-13 | 7332558029725 |
| UPC-12 | 845188026790 |
| Country of origin | Sweden |



IR lens Dual FOV, f=17/29 mm (24°/14°) with case

P/N: T300587


© 2022, FLIR Systems, Inc.

#T300587; r. 86959;

Compatible with the following products:

- 79301-0101; FLIR T530 14°
- 79302-0101; FLIR T530 24°
- 79304-0101; FLIR T530 24° + 14°
- 79306-0101; FLIR T530 24° + 14° & 42°
- 79305-0101; FLIR T530 24° + 42°
- 79303-0101; FLIR T530 42°
- 79307-0101; FLIR T530 42° + 14°
- 79308-0101; FLIR T530 Dual FOV 14° + 24°
- 79301-0201; FLIR T540 14°
- 79302-0201; FLIR T540 24°
- 79304-0201; FLIR T540 24° + 14°
- 79306-0201; FLIR T540 24° + 14° & 42°
- 79305-0201; FLIR T540 24° + 42°
- 79303-0201; FLIR T540 42°
- 79307-0201; FLIR T540 42° + 14°
- 79308-0201; FLIR T540 Dual FOV 14° + 24°
- 89001-0101; FLIR T560 14°
- 89002-0101; FLIR T560 24°
- 89004-0101; FLIR T560 24° + 14°
- 89006-0101; FLIR T560 24° + 14° & 42°
- 89005-0101; FLIR T560 24° + 42°
- 89003-0101; FLIR T560 42°
- 89007-0101; FLIR T560 42° + 14°
- 89009-0101; FLIR T560 Dual FOV 14° + 24°
- 82501-0201; FLIR T840 14°
- 82502-0201; FLIR T840 24°
- 82504-0201; FLIR T840 24° + 14°
- 82506-0201; FLIR T840 24° + 14° & 42°
- 82509-0201; FLIR T840 24° + 14° & 6°
- 82505-0201; FLIR T840 24° + 42°
- 82508-0201; FLIR T840 24° + 6°
- 82503-0201; FLIR T840 42°
- 82507-0201; FLIR T840 42° + 14°
- 82510-0201; FLIR T840 Dual FOV 14° + 24°
- 89201-0101; FLIR T860 14°
- 89202-0101; FLIR T860 24°
- 89204-0101; FLIR T860 24° + 14°
- 89206-0101; FLIR T860 24° + 14° & 42°
- 89211-0101; FLIR T860 24° + 14° & 6°
- 89205-0101; FLIR T860 24° + 42°
- 89210-0101; FLIR T860 24° + 6°
- 89203-0101; FLIR T860 42°
- 89207-0101; FLIR T860 42° + 14°
- 89212-0101; FLIR T860 Dual FOV 14° + 24°
- 89201-0201; FLIR T865 14°
- 89202-0201; FLIR T865 24°
- 89204-0201; FLIR T865 24° + 14°
- 89206-0201; FLIR T865 24° + 14° & 42°
- 89213-0201; FLIR T865 24° + 14° & 6°
- 89205-0201; FLIR T865 24° + 42°
- 89212-0201; FLIR T865 24° + 6°
- 89203-0201; FLIR T865 42°
- 89207-0201; FLIR T865 42° + 14°
- 89214-0201; FLIR T865 Dual FOV 14° + 24°

© 2016, FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.

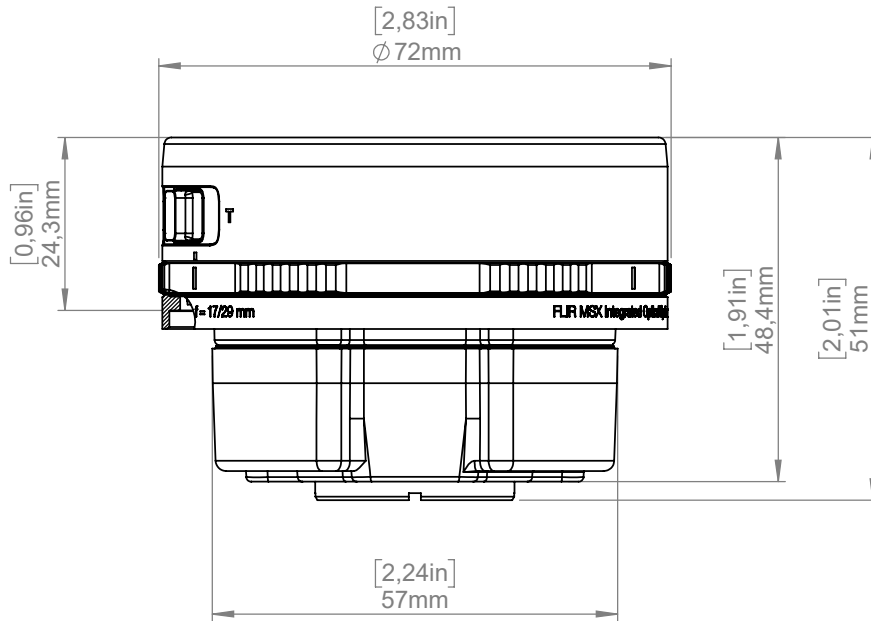

| | | | | | |
|--|---------------|-----------------------------|-------------------------------|-------------------|---------------|
| Modified 2022-06-29 | Check AKZE | Drawn by R&D Instruments | | | |
| Denomination Basic dimensions for lens T300530 | | | | Size A4 | |
| | | | Scale 1:1 | | Sheet 1(1) |
| | | | Drawing No. T131822 | Rev A | |