

MR60 Moisture Meter Pro

P/N: MR60

Copyright

© 2021, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: MR60 Commit: 78766 Language: en-US Modified: 2021-08-19 Formatted: 2021-08-19

Website

http://www.flir.com

Customer support

http://support.flir.com

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



General description	
Part number	MR60
Part name	Moisture Meter Pro

The FLIR MR60 Moisture Meter Pro is a full-featured construction troubleshooting tool, allowing the collection and storage of moisture data over time from multiple sites.

An integrated pinless sensor and an external pin probe provide the flexibility to take either intrusive or non-intrusive measurements. Built tough with an industry-leading warranty, the MR60 can serve as your go-to troubleshooting tool right out of the box, helping you find hidden moisture issues and capture reliable data more efficiently.

Troubleshoot quickly:

- · Easily investigate insulation and moisture issues
- Pinless technology for fast non-intrusive measurements
- External pin probe included for invasive moisture measurements
- Includes construction material ranges
- · Stores multiple readings with date/time stamp
- Data can be exported as CSV files to use with PC-based tools

Portable, tough and durable:

- Drop tested rugged design
- · Industry-leading warranty
- Small form factor to conveniently carry with you
- Internal rechargeable battery with USB

Moisture measurement	sture measurement		
Pin moisture via external probe range: accuracy	Wood groups (1-9): 7% - 30% MC ±1.5% MC		
	30 % - 100% (reference only)		
	Construction material groups (10-11): 0- 20% (reference only)		
Pin moisture groups	Nine (9) wood groups, two (2) construction material groups		
Pinless moisture range	0–100 relative measurement		
Pinless moisture depth	1.9 cm (0.75") maximum		
Sample rate	10 Hz (approx., both modes)		
Measurement resolution	0,1		
Response time Pinless	100 ms		
Response time Pin Mode	750 ms		

General information	ral information	
Display type (W x H)	QVGA (320 x 240) pixel 2.3" 64K color TFT graphic display	
Warranty	https://www.flir.com/testwarranty	

1 (6) www.flir.com



MR60 Moisture Meter Pro

P/N: MR60

© 2021, FLIR Systems, Inc. #MR60; r. 78766; en-US

General information			
Stored data file format	Comma Separated Values (.csv) format with da time stamp. Reading value, reading type included.		
Saved screenshot file format	Bitmap (.bmp) with measurement values overlaid		
Stored screenshot capacity	9999 screenshots		
Internal memory	4GB		
Certifications			
Certification standards	EN61326 (EMC), EN61010 (Battery + Charger)		
Agency approvals	FCC Class B, CE, UL, RCM		
Power system			
Power requirements:	Integrated rechargeable battery		
Continuous Run Time:	18 hours max		
Typical Usage:	4 work weeks		
Auto power off:	Programmable: OFF, 1, 5, or 20 minutes		
Power adapter	100-240 V input/ 5 V 1A output		
Battery	3.7 V, 2000 mAh Li-ion rechargeable via micro USB		
Environmental			
Drop Test	3 m (9.8 ft)		
Operating temperature	0~50 °C (32~122 °F)		
Storage temperature	-10~60°C (14~140°F)		
Operating humidity	≤ 90%, 0~30°C (32~86°F) ≤ 75%, 30~40°C (86~104°F) ≤ 45%, 40~50°C (104~122°F)		
Storage humidity	90% RH		
Meter physical data			
Weight	300 g (10.6 oz.)		
Dimensions $(H \times W \times L)$	14 × 7.2 × 4.2 cm (5.5 × 2.8 × 1.7 in)		
Material	PC-ABS		
Color	Black		
Shipping information			
Packaging, type	Retail color box		
Packaging, Contents	MR60, MR02 Pin Probe, Lanyard, Quick Start Guide, FLIR Tools card, T&M line card, Moisture and Accessories line card, International Charger with USB cable, Warranty card		
Each Weight	0.91 kg (2.0 lb.)		
Each Dimensions $(H \times W \times L)$	$33.1 \times 14 \times 12.1$ cm $(13.0 \times 5.5 \times 4.8$ in.)		
Master Carton Weight	13.3 kg (29.3 lb.)		
Master Carton Dimensions (H \times W \times L)	er Carton Dimensions (H \times W \times L) 51.2 \times 25.8 \times 64 cm (20.2 \times 10.2 \times 25.2 in.)		
Master Carton Quantity	12		
EAN-13	0793950370605		
UPC-12	793950370605		
Country of Origin	China		
Tariff Code	9025.8050.00		



MR60 Moisture Meter Pro

P/N: MR60

© 2021, FLIR Systems, Inc. #MR60; r. 78766; en-US


Technical support	
Website	http://support.flir.com


Supplies & accessories:

- MR12; FLIR MR12: Ball probe moisture sensor accessory
- MR02; Replaceable External Moisture Pin Probe for MR77
- MR05; Impact Pin Moisture Probe
- MR06; Wall Cavity Probe
- MR07; Hammer Probe
- MR08; Hammer and Wall Cavity Probe Combo
- MR09; Baseboard probe
- MR10; EVA Protective case
- MR10-2; Protective case for FLIR Moisture Meters

3 (6) www.flir.com

© 2015, FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or the reserved worldwide. No part of this drawing, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited

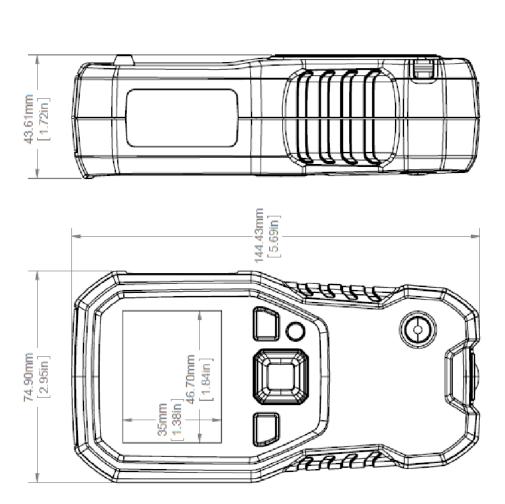

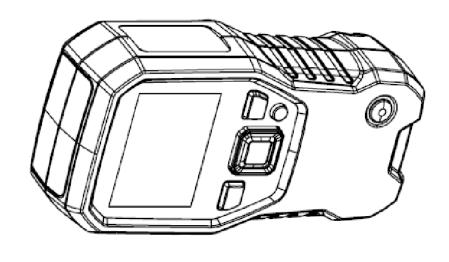

Modified Date	Modified By
Tuesday, April 05, 2016	T&M Engineering
Description	
MR60	
Units	Scale
Millimeters [inches]	Not to Scale



Teledyne FLIR LLC 9 Townsend West, Nashua NH 03063 / Phone: 603.324.7800 / Fax: 603.324.7864

Declaration of Conformity

Extech Model: MR60

Description: Moisture Meter Pro

Date of Issue: 12-Jul-21

We, Teledyne FLIR LLC, 9 Townsend West, Nashua, NH 03063 declare that a sample of the product listed above has been tested by a third party for CE marking

EMC Directive: 2014/30/EU
Report Number: 11186580
Report Date of Issue: 3/25/2016

Standards:

EN 61326-1:2013

LVD Directive: 2014/35/EU

Report Number: E201687-A14-CB-1

Report Date of Issue: 3/31/2016

Standards:

IEC 61010-1 (ed.3)

RoHS Directive: EU Directive 2015/863/EU (RoHS 3)

The test reports show that the product fulfills the requirement in the EC Low Voltage Directive and EMC Directive and RoHS Directive for CE Marking. On this basis, together with the manufacturer's own documented production control, the manufacturer (or his European authorized representative) can in his EC Declaration of Conformity verify compliance with the EC Low Voltage Directive and EC EMC Directive and RoHS Directive.

Mark Sultzbach / QA Manager



Taipei, Taiwan July 28, 2021

UK Declaration of Conformity

Product: FLIR MR60

Name and address of the manufacturer: Teledyne FLIR LLC,

9 Townsend West, Nashua, NH 03063

This declaration of conformity is issued under the sole responsibility of the manufacturer.

The object of the declaration: FLIR MR60.

The object of the declaration described above is in conformity with the relevant statutory requirements applicable to the specific product:

Standards review betw UK legislation refr.	een UK and EU UK designated standard*	EU regulation refr.	EU harmonised standard
EMC		EMC	
S.I. 2016 No. 1091	EN 61326-1:2013	2014/30/EU	EN 61326-1:2013
LVD Directive S.I. 2016 No. 1101	IEC 61010-1 (Ed. 3)	LVD Directive 2014/35/EU	IEC 61010-1 (Ed. 3)
RoHS S.I. 2012 No. 3032	EN 50581:2012	2015/65/EU (RoHS)	EN 50581:2012

* https://www.gov.uk/guidance/designated-standards

Designated standards: EMC - consolidated list, version 1, 1 January 2021

Designated standards: Low voltage equipment - consolidated list, version 1, 1 January 2021

Designated standards: RoHS - consolidated list, version 1, 1 January 2021

FLIR Commercial Systems

Quality Assurance

Hank Tsai

Quality Manager